

INSTALLATION INSTRUCTIONS

REMOTE CONTROL FOR SPLASHDOWN FIXTURE

ITEM # F-LUHB/WD/RC

For use with Topaz model #'s: F-LUHB/150/50K/WD/MS and F-LUHB/200/50K/WD/MS

ON/OFF

Press the "ON/OFF" button, light will remain on or off.
*Press "Auto Mode", "Reset" or "Scene mode" buttons to quit from this mode.

Detection area

Press the button "detection range" to set detection range as 100% / 75% / 50% / 10%.

Hold-time

Press the button "hold-time" to set hold-time as 5s / 30s / 1min / 3min / 5min / 10min / 20min / 30min .

Stand-by dimming level

Press the button "stand-by dimming level" to set the stand-by dimming level as 10% / 20% / 30% / 50%.

Stand-by period


Press the button "stand-by period" to set stand-by period as 0s / 10s / 30s / 1min / 5min / 10min / 30min / +∞.

Note: "0s" means no standby period; "+∞" means unlimited standby period.

Daylight threshold

Press the button "daylight sensor" to set daylight threshold as 2Lux / 10Lux / 30Lux / 50Lux / 80Lux / 120Lux / disable.

Note: setting to "disable" means light will be turned on once sensor detects movement, regardless of the ambient lux.

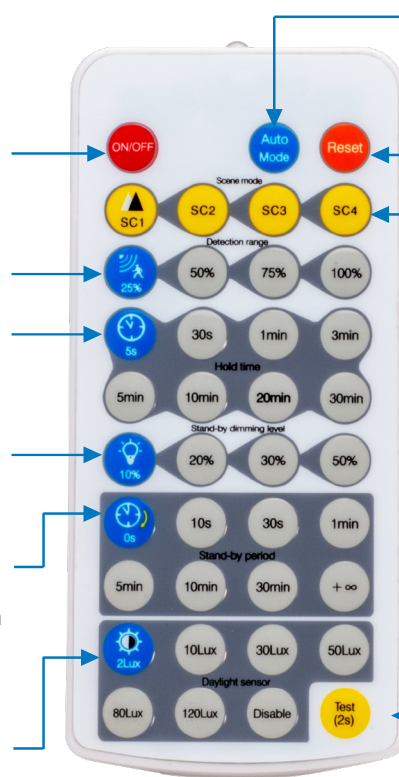

Auto Mode

Press "Auto Mode" button, the sensor starts to work and all settings remain the same before the light gets switched on/off.

Reset

Press "RESET" button, products with DIP switch will be controlled by DIP switches; otherwise all the setting will be just initial, that is 100% detection range, hold time 5S, no stand-by time and daylight threshold disabled.

Scene Mode

Scene mode	Detection area	Hold-time	Daylight threshold	Stand-by period	Stand-by dimming level
SC1	100%	30s	2Lux	1min	10%
SC2	100%	5min	10Lux	10min	10%
SC3	100%	10min	50Lux	30min	10%
SC4	100%	30min	Disable	+∞	10%

The button "Test (2s)" is for testing purpose after commissioning. When pressing this button, the sensor goes to test mode (hold time is only 2s) automatically, stand-by period and daylight sensor are disabled.

This mode can be ended by pressing "reset", "Auto mode", "scene mode" or "hold time". The sensor setting is changed accordingly.

Attention

1. When using ON/OFF button, this will override any other settings.
2. Press "Auto Mode", "Scene Mode" or "Reset" buttons before setting functions Detection Range, Hold time, Daylight sensor, Standby period and Standby dimming level.
3. Press "Scene Mode" and choose one from the existing four scenes.
4. When using the remote control, light will flicker to show instruction received.
5. Every change will be automatically saved.